

TP60022 (Pendant Installation) INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Put swivel (14) through the center hole on canopy (12) and secure with lock nut (11).
2. Choose your desired length of stems (17)(18)(19), and then pass the power supply cord and ground wire through stems (16) (17)(18), washer (15), swivel (14), canopy (12), and lock nuts (11).
3. Connect stems (16) (17)(18) one by one, then attach lower end of stem (18) onto lamp body (19) and upper end of stem (16) into swivel (14).
4. Thread canopy screws (08) into mounting bar(06) and secure with hex nuts (10).
5. Attach mounting bar (06) to outlet box (01) with box screws (09).
6. Make wire connection with white wire (02) and black wire (03). Use wire connectors (05) to secure the connections. Secure ground wire (04) and ground wire from the fixture to mounting bar (06) with ground screw (07).
7. Raise the canopy(12) over the outlet box(01) and secure with the ball nut(13).

INSTALLATION IS NOW COMPLETED

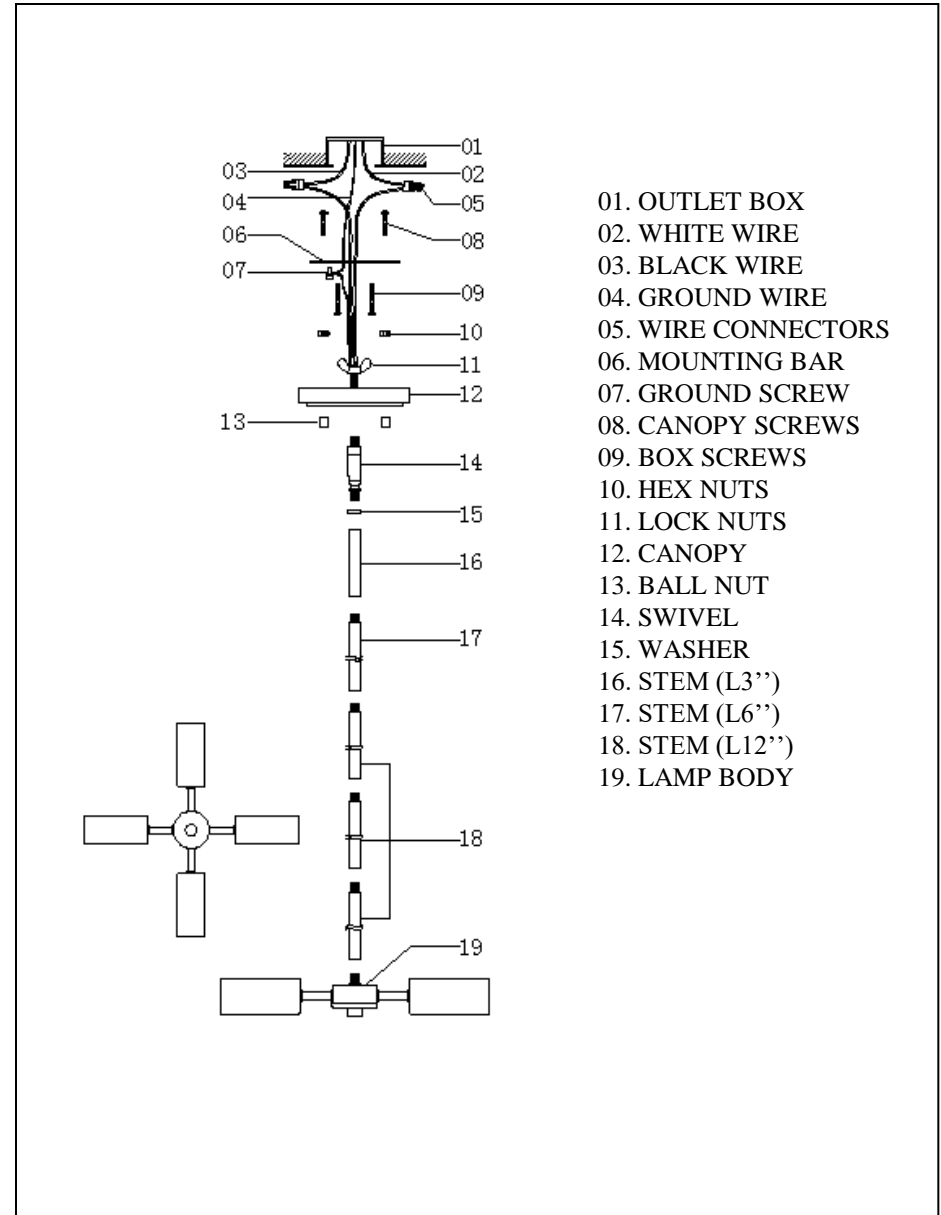

TP60022 (Semi Flush Installation) INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Pass the power supply cord and ground wire through stem (15), washer (14), canopy (12), and lock nuts (11).
2. Attach lower end of stem (15) into lamp body (16) and upper end into canopy. Secure with lock nut (11).
3. Thread canopy screws (08) into mounting bar(06) and secure with hex nuts (10).
4. Attach mounting bar (06) to outlet box (01) with box screws (09).
5. Make wire connection with white wire (02) and black wire (03). Use wire connectors (05) to secure the connections. Secure ground wire (04) and ground wire from the fixture to mounting bar (06) with ground screw (07).
6. Raise the canopy(12) over the outlet box(01) and secure with the ball nut(13).

INSTALLATION IS NOW COMPLETED

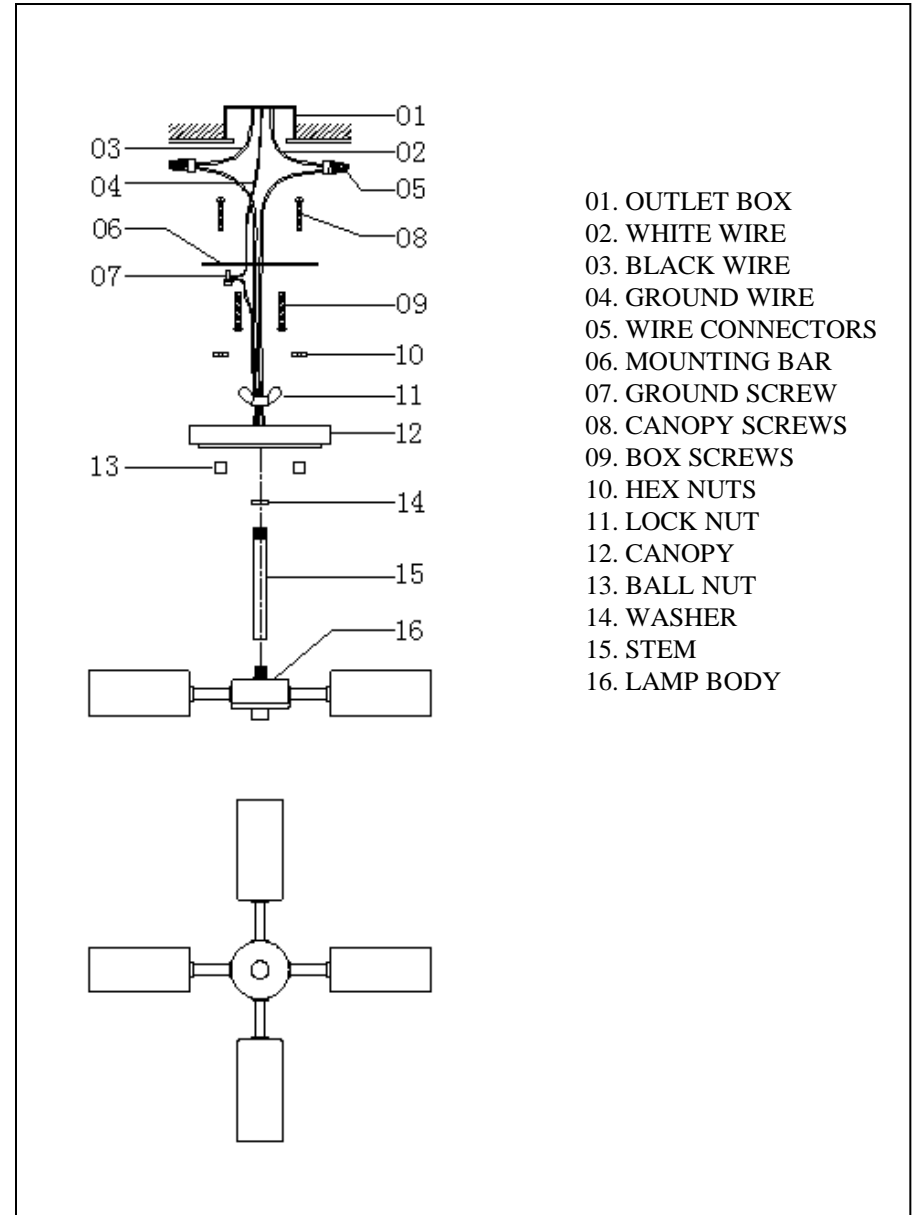

01. OUTLET BOX
02. WHITE WIRE
03. BLACK WIRE
04. GROUND WIRE
05. WIRE CONNECTORS
06. MOUNTING BAR
07. GROUND SCREW
08. CANOPY SCREWS
09. BOX SCREWS
10. HEX NUTS
11. LOCK NUT
12. CANOPY
13. BALL NUT
14. WASHER
15. STEM
16. LAMP BODY